


Soltis Proof W88
Soltis Proof W96
Soltis Opaque 622



Soltis


Proof W88

Waterproof, highly translucent, lightweight and rollable membrane

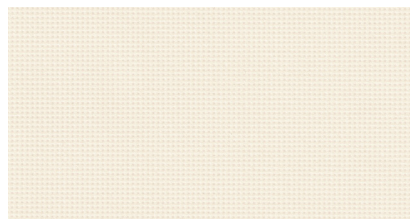


Off white 267 cm

W88-1103

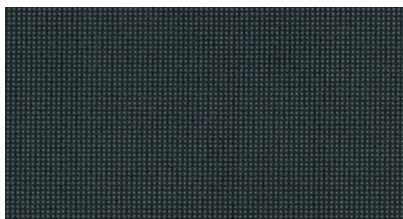

Anthracite 267 cm

W88-2047

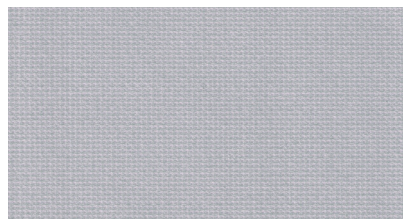

Boulder 267 cm

W88-2171



White 267 cm

W88-8102




Vanilla 267 cm

W88-8861

Soltis


Proof W96

Waterproof, translucent and resistant membrane

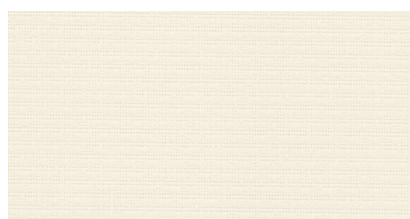


Off white 267 cm

W96-1103

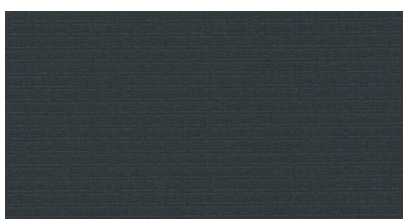


Anthracite 267 cm

W96-2047

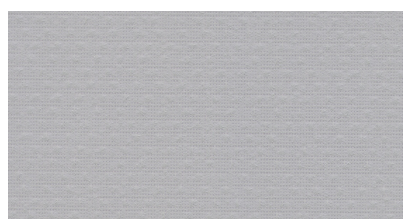


Boulder 267 cm

W96-2171

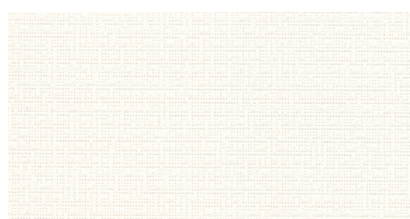

White 267 cm

W96-8102

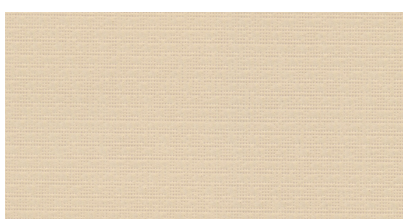


Vanilla 267 cm

W96-8861

Soltis

Opaque 622

Waterproof, opaque, matt and robust membrane

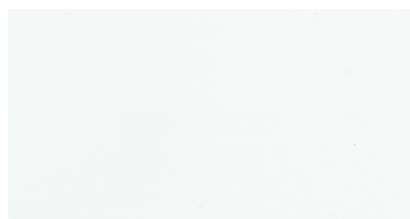


White 267 cm

622-50537



Vanilla 267 cm

622-50539

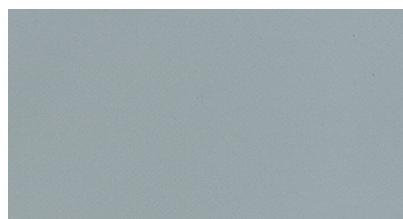

Grey 267 cm

622-50542

Soltis

ProofW88



Waterproof, light and translucent

Soltis Proof W88 is the ideal solution for pergola or awing roofs. It combine high translucency with total waterproofing against bad weather. Furthermore, its light and slim design makes it easy to roll up.

■ Lightweight and translucent canvas


- 100% weatherproof
- Translucent to make the most of natural light; up to 21% of light penetrates the fabric
- Light and thin, takes up little space in retractable roofs
- Excellent winding performance
- High dimensional stability made possible by using Précontraint® technology

■ Unique design

- Aesthetic regular weft
- High colour resistance to UV
- Can be combined with the micro-perforated Soltis Harmony 88

■ Translucide coating

Thanks to a translucent coating applied directly during the production process the product is 100% waterproof throughout its life. The coating avoids any risk of delamination and provides excellent UV resistance.

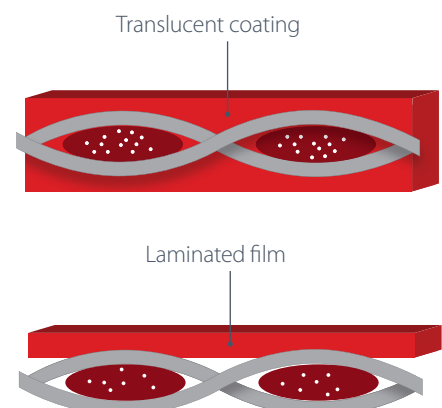

Soltis

Proof W96



Waterproof, resilient and textured

Soltis Proof W96 provides the ultimate in comfort on terraces, allowing them to be used in all seasons. Using outdoor areas throughout the year repays the original investment more quickly.

■ A protective and resilient canvas


- Long term effective and durable protection against inclement weather
- Reinforced mechanical resistance
- Low solar transmission resulting from better heat protection
- Glare reduced by improved protection
- High dimensional stability made possible by using Précontraint® technology

■ Textured and lasting design

- Transparency allows textured aspects to be visible
- Colours have strong resistance to UV
- Can be combined with the micro-perforated version Soltis Lounge 96

■ Exclusive Précontraint® technology

This unique, worldwide patented technology maintains the composite in bi-axial tension throughout the manufacturing cycle. It gives our materials exceptional performance performance, allowing them to surpass market standards in terms of dimensional stability, mechanical strength, coating thickness and flatness.

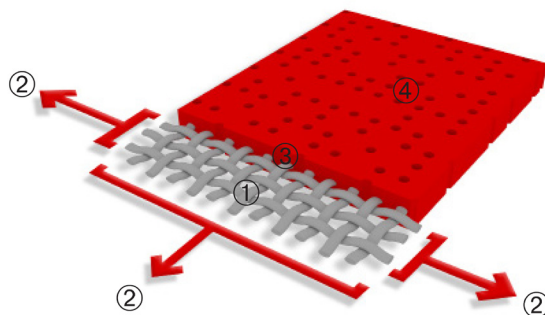

High-tenacity polyester micro-yarn weave	①	Superior elongation and tear resistance
Coating under bi-axial constant tension in both warp and weft directions	②	No deformation during processing and use
Greater coating at the top of the yarns and dirt-resistant surface treatment	③	Superior aesthetic and mechanical durability
Exceptional flatness and thinness	④	Smooth finish easy to clean, space saving, easy rolling

Soltis

Opaque 622



Waterproof, opaque and thermal comfort

Soltis Opaque 622 protects against heat, glare and bad weather. With its matte finish, this waterproof canvas adapts perfectly to the most modern pergola projects.

■ Canvas for outstanding resistance

- Optimal mechanical resistance
- Efficient weather protection
- Enhanced durability made possible by its opacity which prevents transparent dirt from showing through even on light colours
- Opaque for enhanced control of luminous flux in areas highly exposed to the sun
- High dimensional stability made possible by using Précontraint® technology


■ Comfortable to use

- Easy maintenance due to its smooth surface
- Excellent UV resistance

Customise your pergola walls



Scan this QR Code
for create your pergola

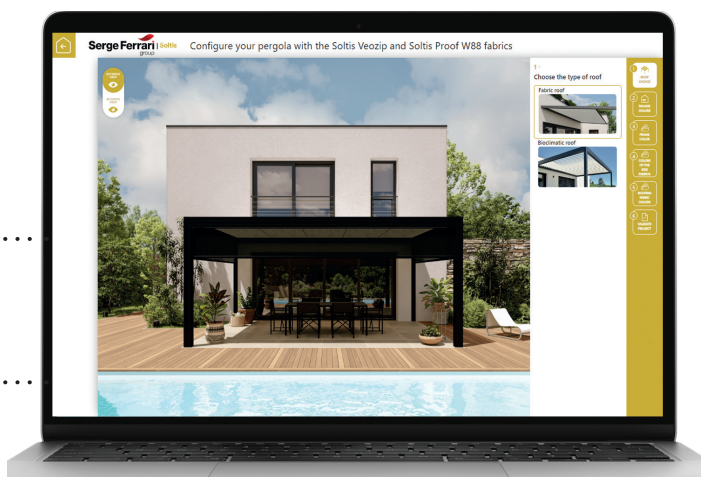

Soltis

ProofW88 | ProofW96 | Opaque 622

Soltis ProofW88	Soltis ProofW96	Soltis Opaque 622
-----------------	-----------------	-------------------

	■ Technical properties			Standards
Weight	490 g/m ² • 14.5 oz/sq.yd	620 g/m ² • 18.3 oz/sq.yd	750 g/m ² • 22.1 oz/sq.yd	EN ISO 2286-2
Thickness	0.43 mm • 430 microns	0.56 mm • 560 microns	0.63 mm • 630 microns	
Width	267 cm • 105.1 in.	267 cm • 105.1 in.	267 cm • 105.1 in.	
Sealing	10,000 mm • 393.7 in.	10,000 mm • 393.7 in.	10,000 mm • 393.7 in.	EN ISO 811






	■ Roll length			
Standard format	40 lm • 43.74 yd	35 lm • 38.28 yd	50 lm • 54.68 yd	

	■ Physical properties			
Tensile strength (warp/weft)	140/140 daN/5 cm	220/220 daN/5 cm	230/220 daN/5 cm	EN ISO 1421
Tear strength (warp/weft)	12/12 daN	25/20 daN	20/20 daN	DIN 53.363

	■ Reaction to fire			
Rating	M2/NFP 92-507 B1/DIN 4102-1 M2/UNE 23.727-90 Class 2/UNI 9177-87 Schwerbrennbar-Q1-Tr1/ ONORM A3800-1 Class 1/EN 13773 Method 1 and 2/NFPA 701 Class A/ASTM E84	M2/NFP 92-507 B1/DIN 4102-1 CSFM T19 M2/UNE 23.727-90 Class 2/UNI 9177-87 Schwerbrennbar-Q1-Tr1/ ONORM A3800-1 Class A/ASTM E84 Method 1 and 2/NFPA 701 1530.2/AS/NZS 1530.3/AS/NZS Goup 1/AS NZS 3837 Class 1/EN 13773 G1/GOST 30244-94	M2/NFP 92-507 M2/UNE 23.727-90 B1/DIN 4102-1 BS 7837 1530.2/AS/NZS 1530.3/AS/NZS	
Euroclass	B-s2,d0	B-s2,d0	B-s2,d0	EN 13 501-1

	■ Management system	
Quality		ISO 9001
Environment		ISO 14001
Energy		ISO 50001

■ Certifications, labels, warranty

				5-year warranty	
--	---	---	---	------------------------	---

■ Tools and services

* Only for Soltis ProofW96
ACV and FDES available on request
Tool for evaluating the energy savings that can be achieved with Soltis solar protection: SOLTISSIM.

¹ "+=0" logo: summarises the Serge Ferrari Group's commitment to CSR, to align economic performance and positive impact. Find out about our concrete actions in our CSR report.

The technical characteristics listed are average values with a tolerance of +/- 5%.

Purchasers of our products are responsible for their application or transformation with regard to any third party rights. Purchasers of our products are also responsible for their implementation and installation in compliance with the destination country's best practices and safety rules. Contractual guarantees are included in the terms of the guarantee.

The values mentioned in this document are based on test results in compliance with study practice. These are provided as indications so that customers can obtain optimal performance from using our products. These are subject to technical improvements and we reserve the right to change specifications at any time. Purchasers of our products are responsible for asserting that the data presented above is in compliance with the validity of the above data.